

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 February 2005 (17.02.2005)

PCT

(10) International Publication Number
WO 2005/013743 A1

(51) International Patent Classification⁷: A43B 7/06, 13/20

(21) International Application Number:

PCT/EP2004/008334

(22) International Filing Date: 26 July 2004 (26.07.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

PD2003A000176

1 August 2003 (01.08.2003) IT

(71) Applicants and

(72) Inventors: OMETTO, Walter [IT/IT]; Corso Milano,
94, I-35139 Padova (IT). MOCVERO, Anna, Maria
[IT/IT]; Via Bellavitis, 13, I-35127 Padova (IT).


(74) Agent: MODIANO, Guido; Modiano & Associati, Via
Meravigli, 16, 20123 Milano (IT).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GH, GI, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PI, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SHOE WITH FOOT MASSAGING SOLE

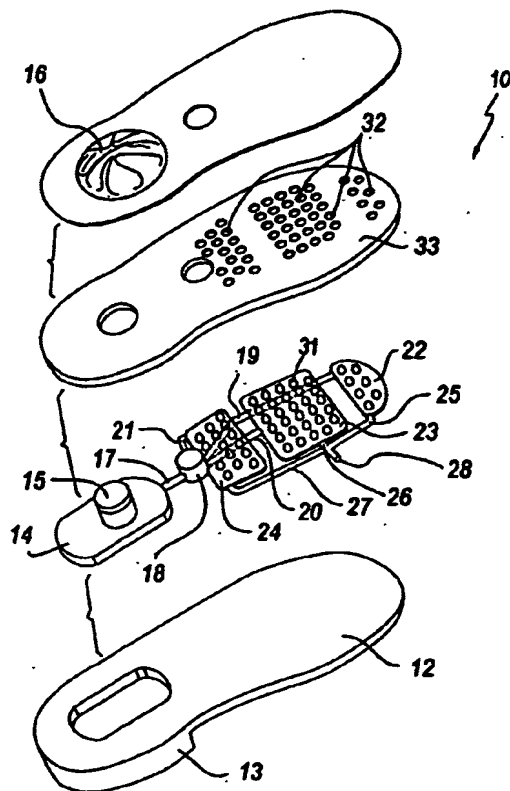

(57) Abstract: A shoe (10) comprising a sole (12) which is provided, in its heel (13), with a tank (14) in which pressurized air is accumulated by means of a pump (15) actuated by the heel of the foot during normal walking. The shoe is provided with a foot supporting insole (33), which is provided with a plurality of holes (32) in which a plurality of studs (31) move at right angles to the ground; the studs are associated with an elastic chamber (22, 23, 24), which is connected to the air tank with the interposition of a discharge valve (18), which acts when the pressure inside the tank has reached a preset value; the studs accordingly act impulsively against the sole of the foot at preset intervals.

WO 2005/013743 A1